



A →

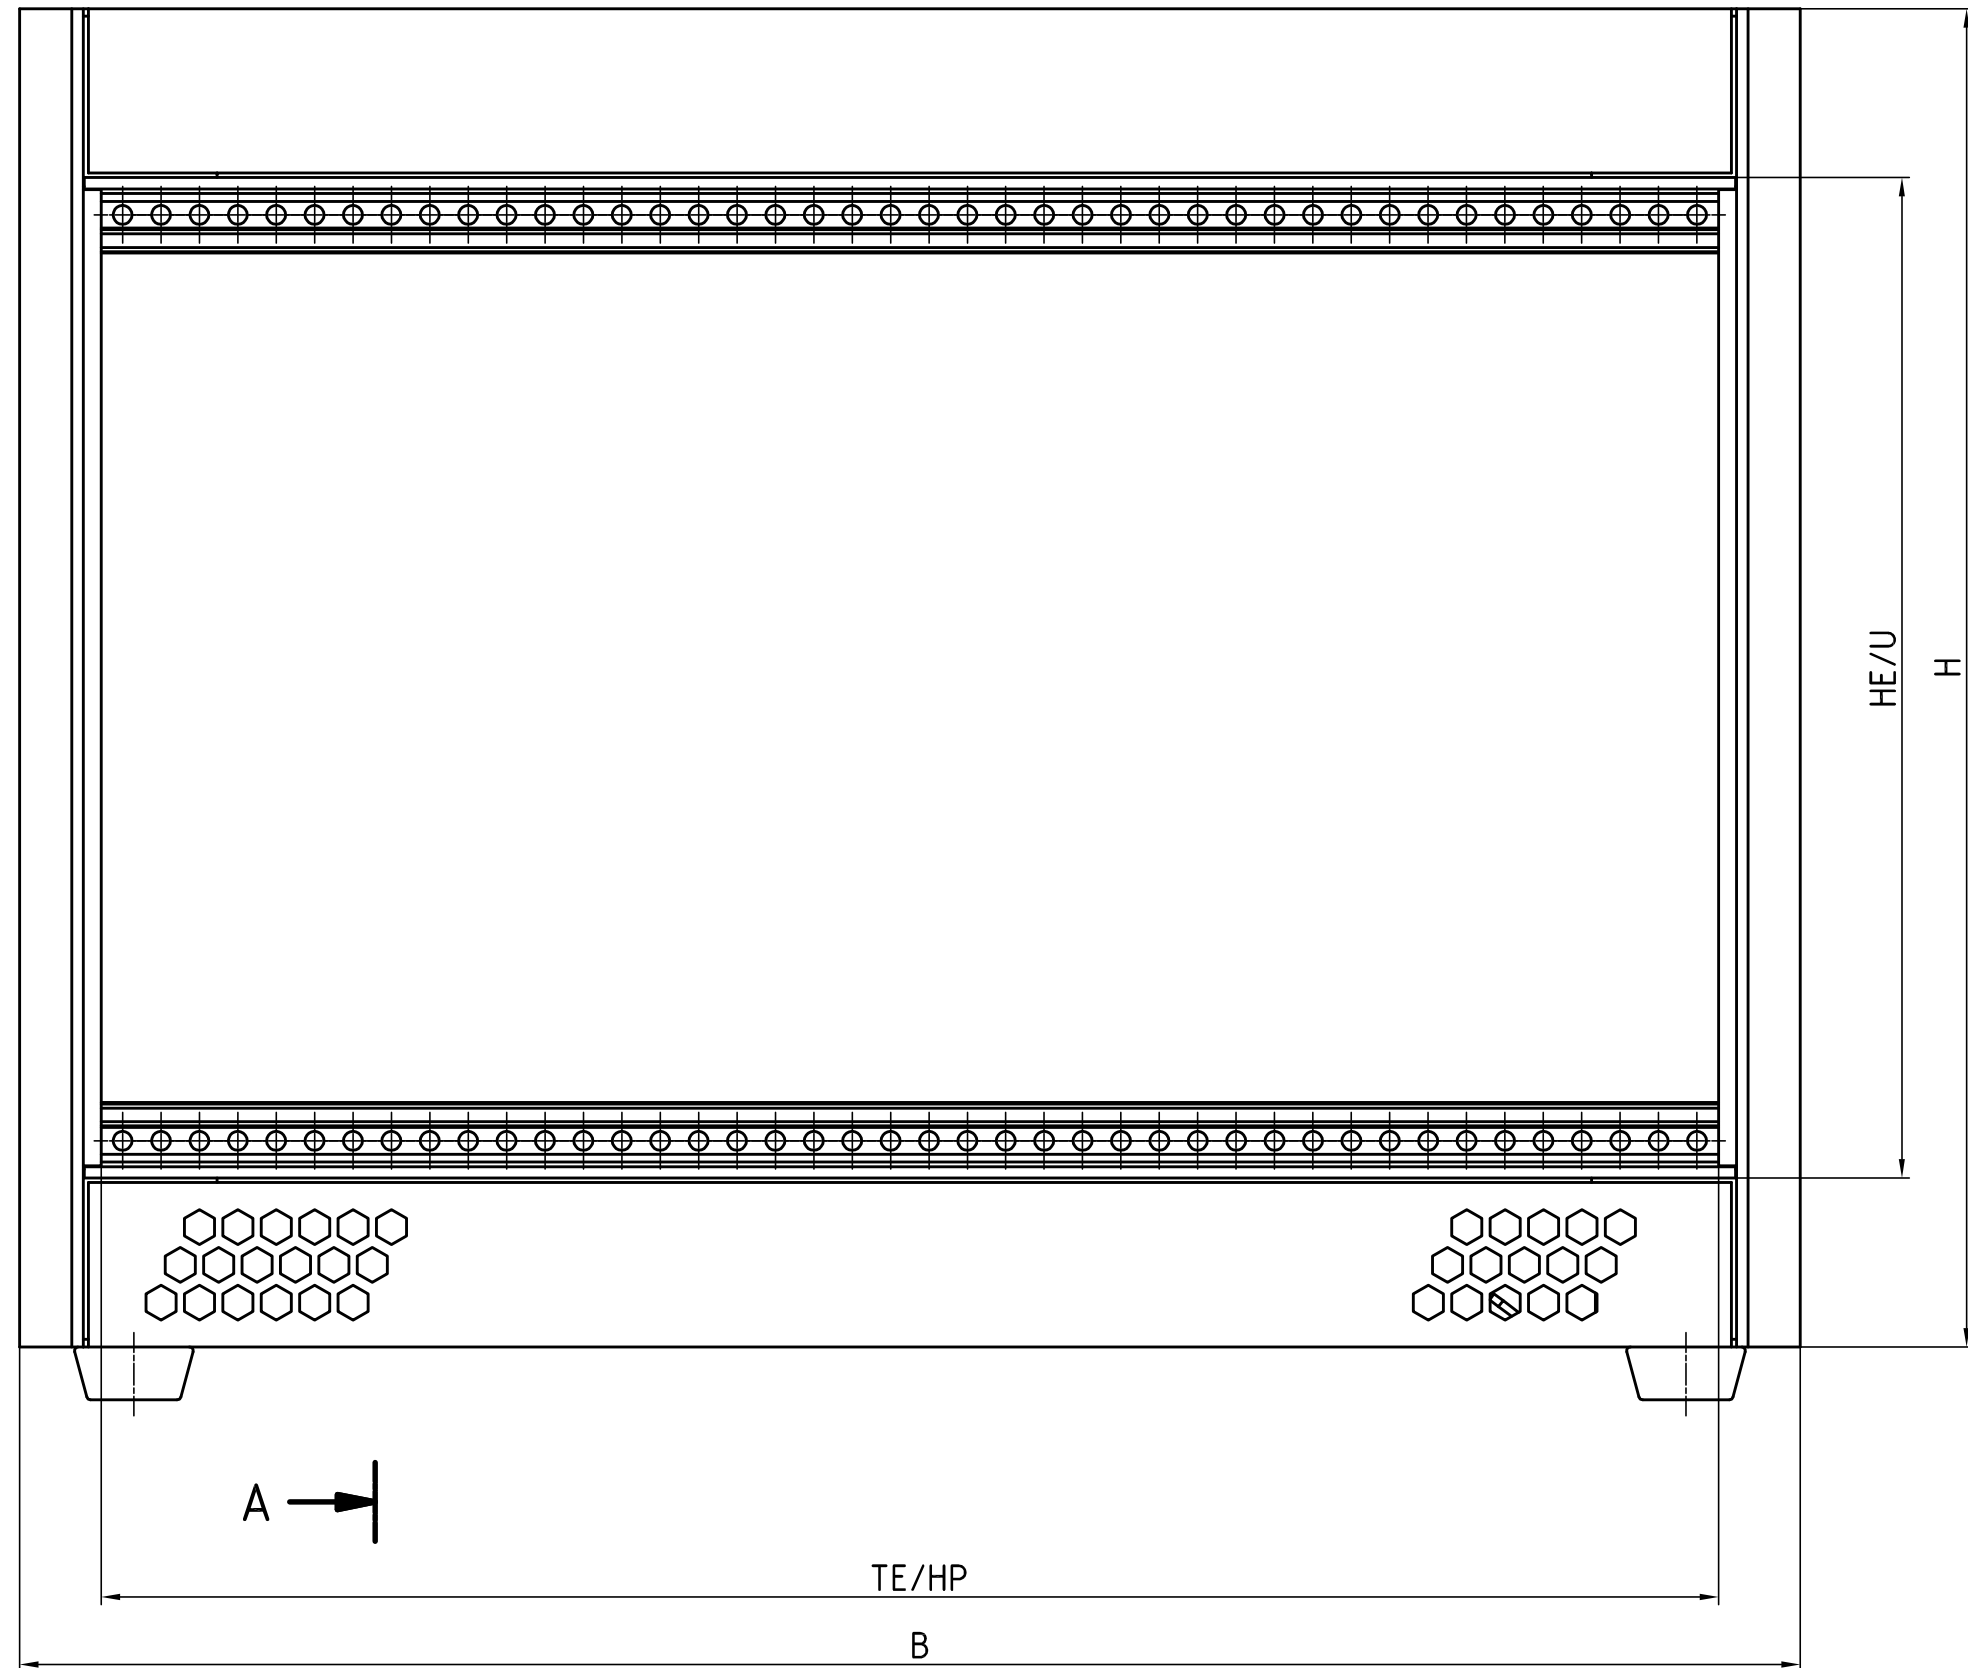

A-A

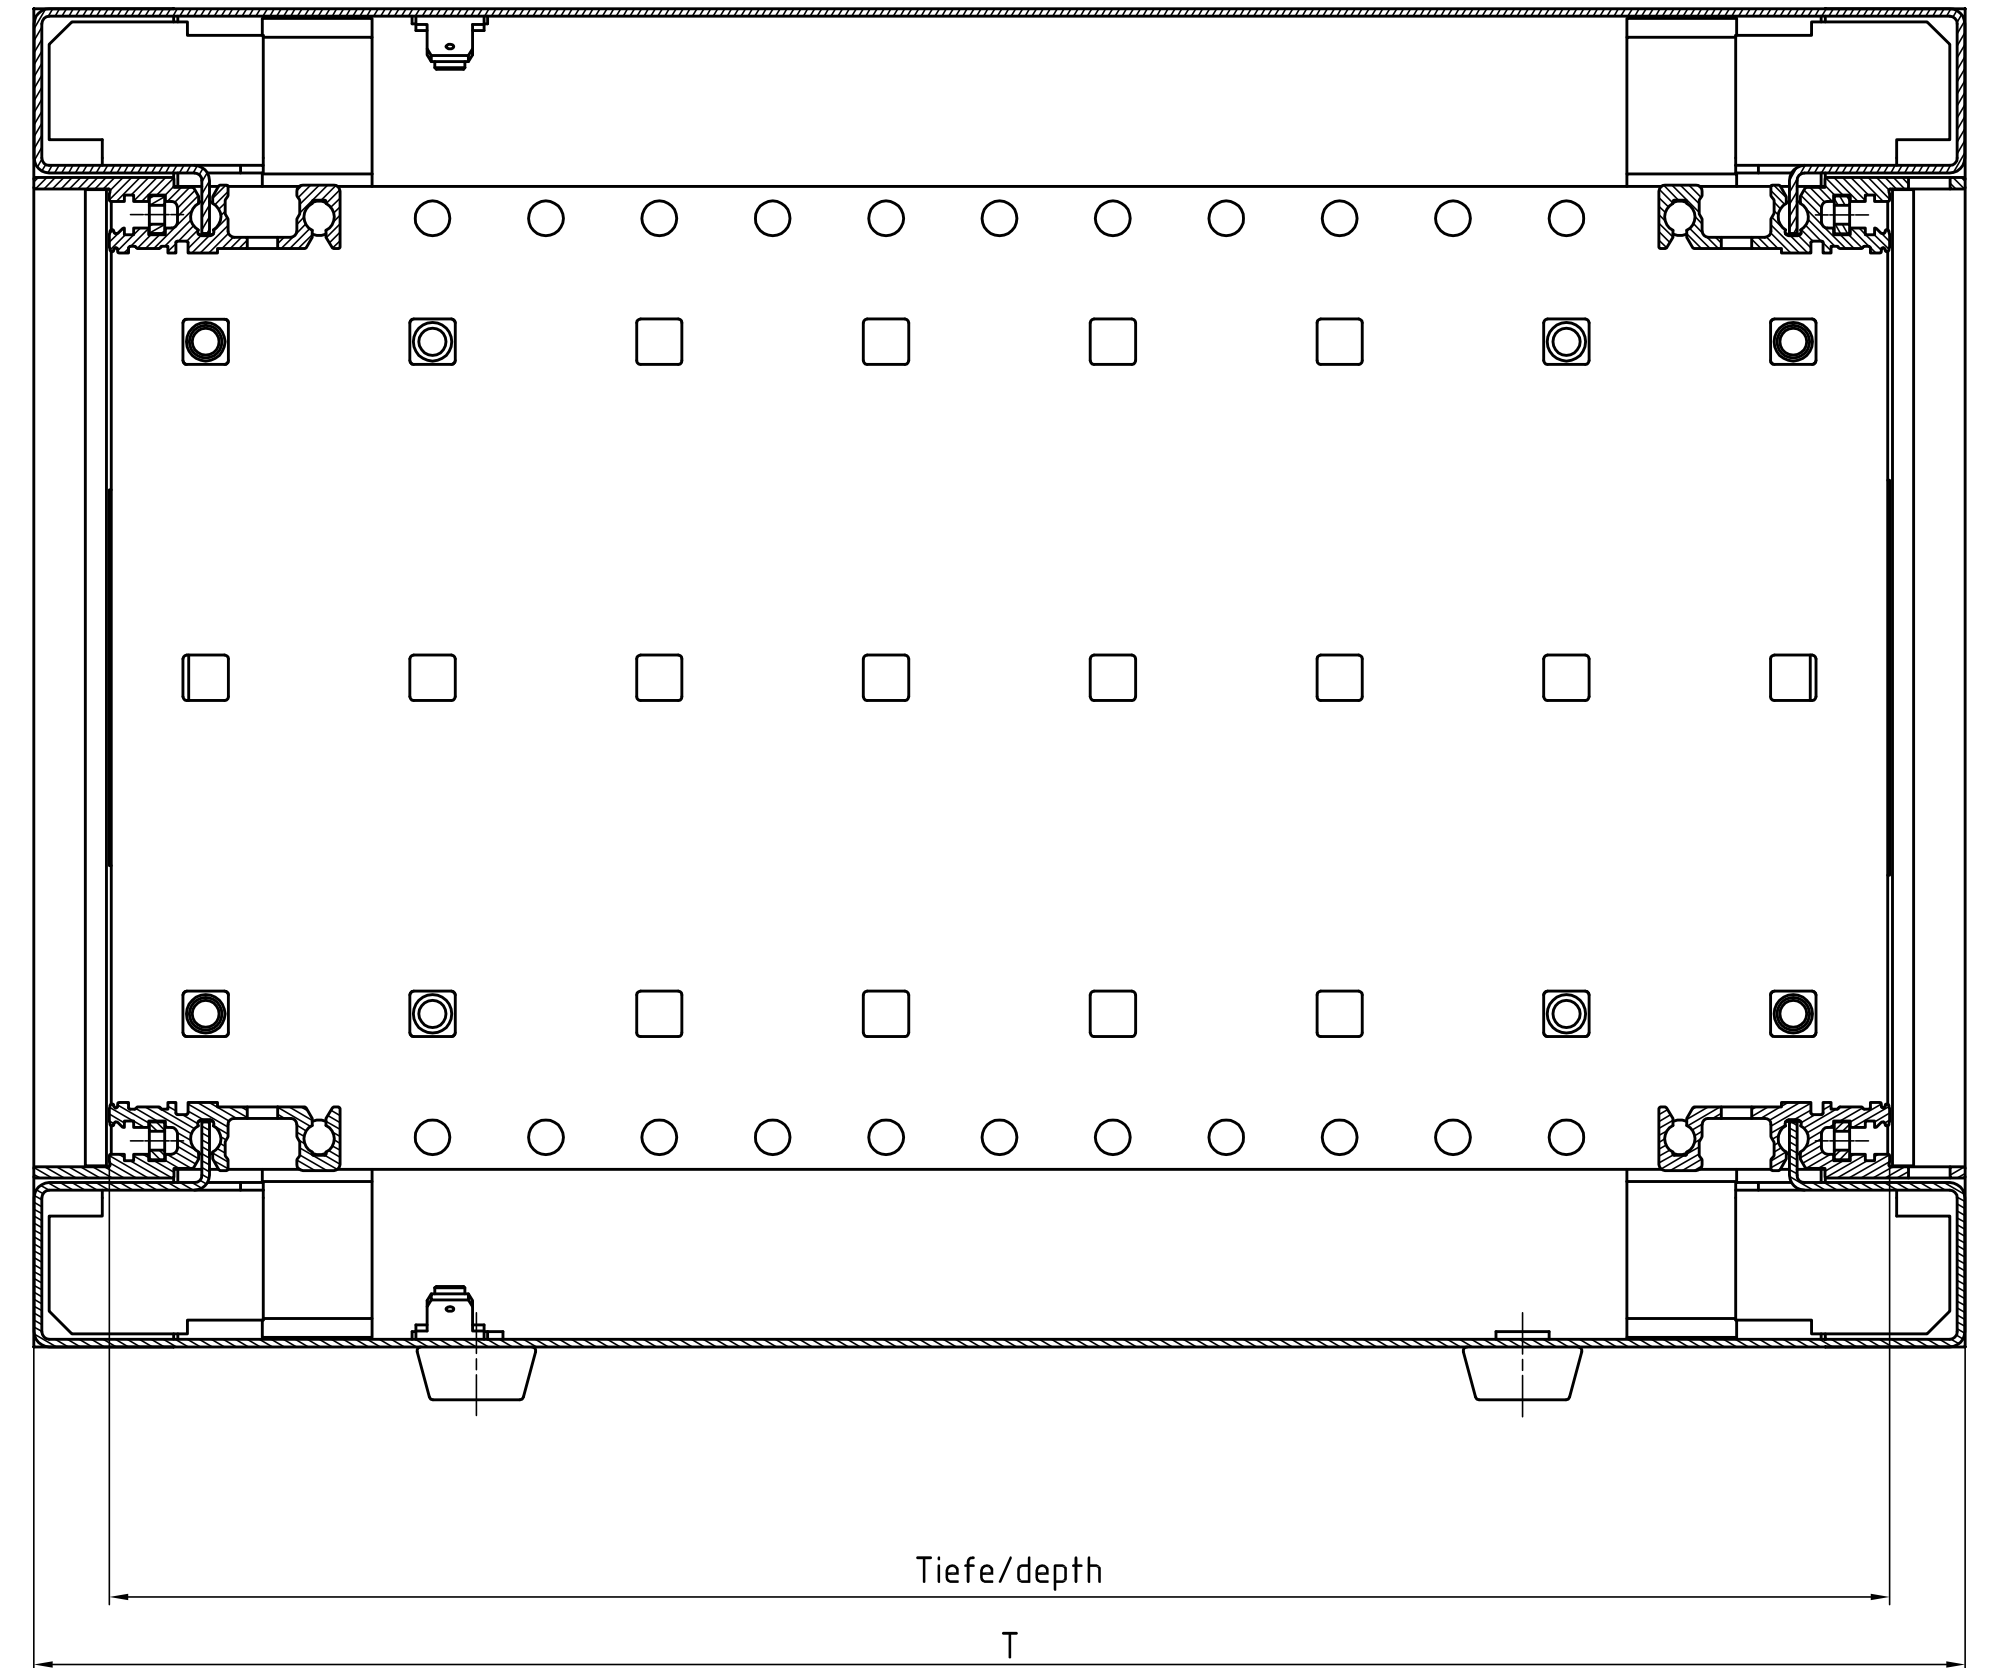


"Schutzvermerk nach DIN ISO 16016 beachten." "Please pay attention to copyright note DIN ISO 16016"

**Internorm Stil mit Lüftung/Internorm Stil with ventilation**

Modell/model	HE/U	TE/HP	Tiefe/depth	H	B	T
INS 24340-L	3	42	235,50	177,0	235,54	255,50
INS 24360-L	3	63	235,50	177,0	342,02	255,50
INS 24380-L	3	84	235,50	177,0	448,70	255,50
INS 30340-L	3	42	295,50	177,0	235,54	315,50
INS 30360-L	3	63	295,50	177,0	342,02	315,50
INS 30380-L	3	84	295,50	177,0	448,70	315,50
INS 36360-L	3	63	355,50	177,0	342,02	375,50
INS 36380-L	3	84	355,50	177,0	448,70	375,50
INS 42380-L	3	84	415,50	177,0	448,70	435,50
INS 48380-L	3	84	475,50	177,0	448,70	495,50
INS 30640-L	6	42	295,50	310,35	235,54	315,50
INS 30660-L	6	63	295,50	310,35	342,02	315,50
INS 30680-L	6	84	295,50	310,35	448,70	315,50
INS 36640-L	6	42	355,50	310,35	235,54	375,50
INS 36660-L	6	63	355,50	310,35	342,02	375,50
INS 36680-L	6	84	355,50	310,35	448,70	375,50
INS 42680-L	6	84	415,50	310,35	448,70	435,50
INS 48680-L	6	84	475,50	310,35	448,70	495,50

Maßstab/  
Scale: 1:1



Zeichnungs-Nr. / Drawing-No.:  
2K 5330.0017.02

Artikel / Article:  
Internorm Stil mit L  
Internorm Stil with L  
Katalogzeichnung / Catalogue drawing

A.Nr./  
Alt-No.: 3973  
Datum/  
Date: 15.06.2011



DISK: 2 902 905  
Datum/Date: 15.01.2008 OK